

# PUNTO L2 4000K 20°


Cod. 6801625064

## SPOTLIGHT WITH FORMWORK and 1m of CABLE

Fixed color walkable outdoor walkway marker with two side light outlets. With 6 high-power LEDs. With gray aluminum round dome. Not suitable for permanent immersion. Guaranteed for 60 days at full immersion. Complete with cable and formwork. Customizable colors on request. DIMMABLE WITH SPECIAL ACCESSORY. OTHER COLOR TEMPERATURES ON REQUEST.

### Technical data:

Power supply	24V DC
Current	0,2 A
Maximum power consumption	5 W
Electrical insulation class	III
Connection	1 m OF NEOPRENE CABLE 2X0,75
Maximum cable length	200 m
Beam angle	2x20°
Number of LEDs	2+2
LED colour	4000K
Colour Rendering	CRI>80
Total luminous flux	288 x 2 lm
White luminous flux	1
Red luminous flux	2
Green luminous flux	3
Body	ANODIZED ALUMINIUM
Finish colour	PAINTED GREY
Weight	0,5 Kg
IP protection rating	IP68
Working position	WALKABLE
Cooling system	NATURAL CONVECTION
Ambient temperature limits	-20°C/+40°C
Thermal protection	ACTIVE ELECTRONICS

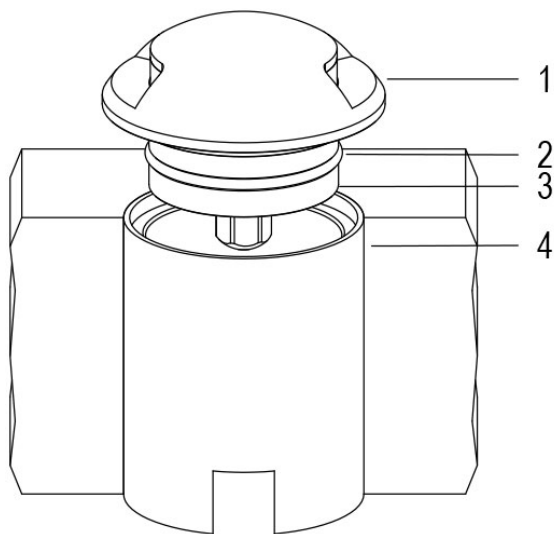

- 1 ALUMINUM DOME
- 2 RUBBER RING
- 3 ANODIZED ALUMINIUM
- 4 PLASTIC FORMWORK
- 5 FLOORING


17/01/24 - The data in this document may be changed without notice in order to improve the product or to correct any errors.

# PUNTO L2 4000K 20°

Cod. 6801625064

## SPOTLIGHT WITH FORMWORK and 1m of CABLE

Fixed color walkable outdoor walkway marker with two side light outlets. With 6 high-power LEDs. With gray aluminum round dome. Not suitable for permanent immersion. Guaranteed for 60 days at full immersion. Complete with cable and formwork. Customizable colors on request. DIMMABLE WITH SPECIAL ACCESSORY. OTHER COLOR TEMPERATURES ON REQUEST.

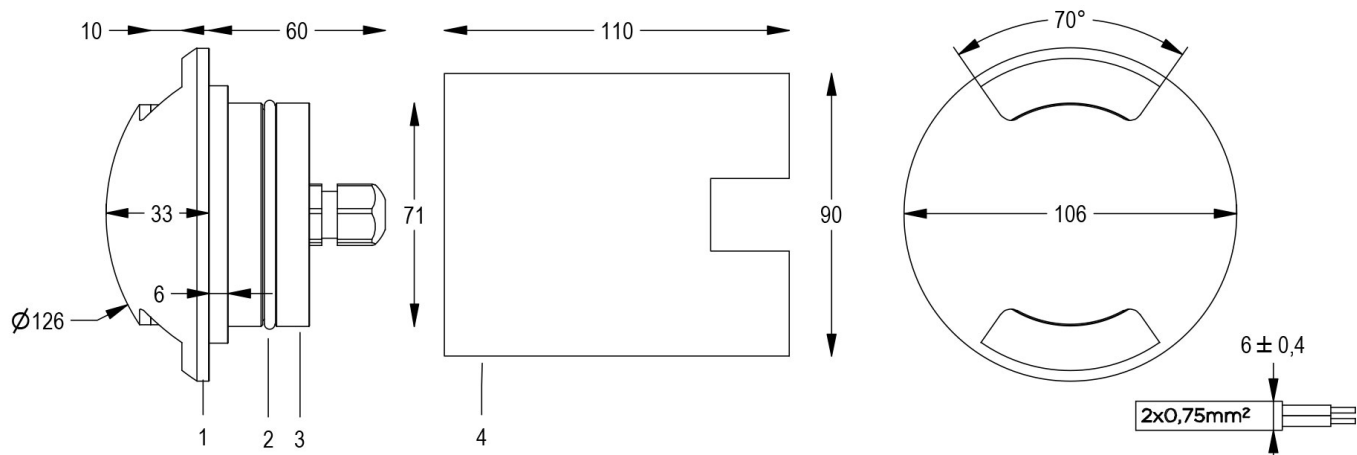

17/01/24 - The data in this document may be changed without notice in order to improve the product or to correct any errors.