


MINI PONY F WHITE 3000K Cod. 9812035202

SPOTLIGHT WITH GEL HOLDER and 1m of CABLE

Handy and swiveling spot with compact size and manual zoom adjustment with Fresnel lens, high-power 1 COB source. Complete with color gel frame. CUSTOM COLORS ON REQUEST.

Technical data:

Power supply	100-240 V AC 50/60Hz
Current	0.25 A @230V AC
Maximum power consumption	55W
Electrical insulation class	I
Connection	1 m OF NEOPRENE CABLE 3X1.5
Beam angle	17°/100°
Number of LEDs	1
LED colour	3000K
Colour Rendering	CRI>90
Total luminous flux	6900 lumens
Body	EXTRUDED ALUMINIUM + SHEET METAL
Finish colour	PAINTED WHITE
Weight	1.9 kg
IP protection rating	IP20
Working position	ANY
Cooling system	FORCED VENTILATION
Ambient temperature limits	-20°C/+40°C
Thermal protection	ACTIVE ELECTRONICS
Control signal	DALI

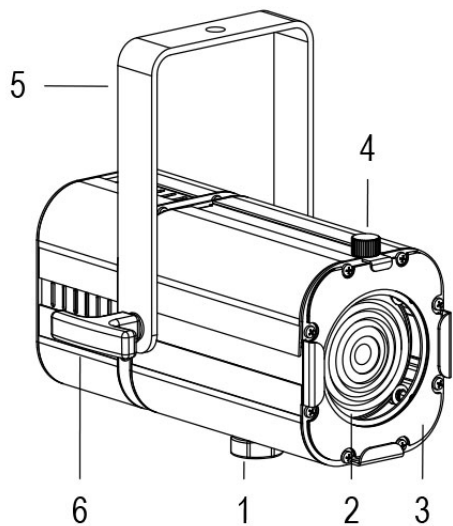


- 1 ADJUSTABLE ZOOM
- 2 FRESNEL LENS
- 3 GEL HOLDER FRAME
- 4 FRAME RETAINING FLYWHEEL
- 5 ORIENTABLE FORK
- 6 PIVOT HINGE

13/05/22 - The data in this document may be changed without notice in order to improve the product or to correct any errors.

MINI PONY F WHITE 3000K Cod. 9812035202

SPOTLIGHT WITH GEL HOLDER and 1m of CABLE

Handy and swiveling spot with compact size and manual zoom adjustment with Fresnel lens, high-power 1 COB source. Complete with color gel frame. CUSTOM COLORS ON REQUEST.

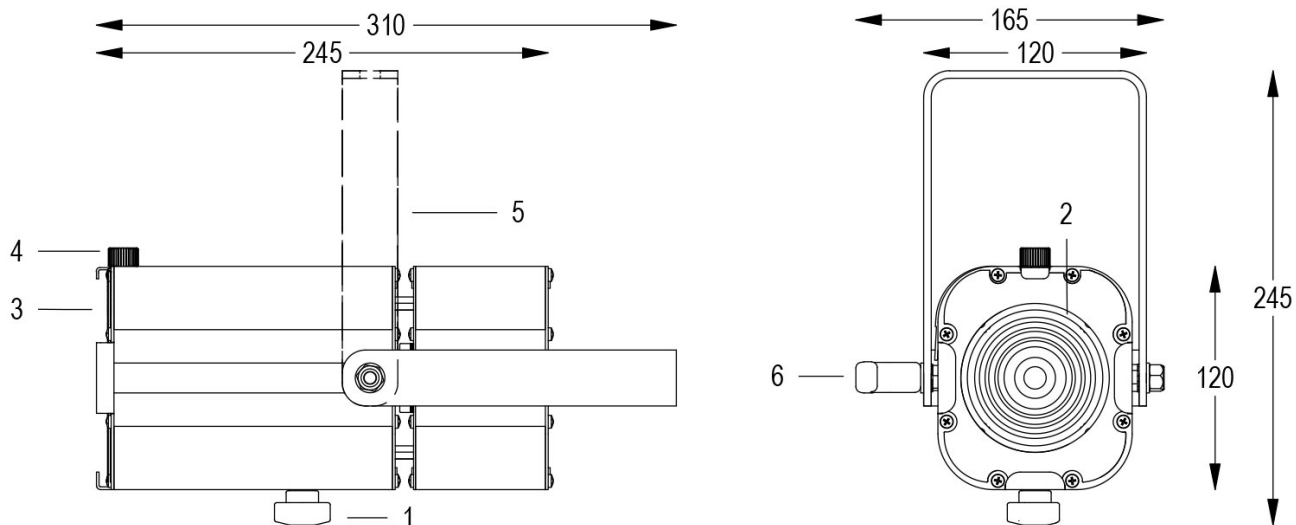

Allo zoom minimo

Dist. m	2	3	4	5	6	7
Lux	914	406	228	146	102	75
Diam. m	3,4	5,2	6,9	8,6	10,3	12,1

Allo zoom massimo

Dist. m	2	4	6	8	10	12
Lux	5625	1406	625	352	225	156
Diam. m	0,5	1,1	1,6	2,2	2,7	3,3

13/05/22 - The data in this document may be changed without notice in order to improve the product or to correct any errors.