


MINI PONY F BLACK 3000K Cod. 9812035205

SPOTLIGHT WITH GEL HOLDER and 1m of CABLE

Handy and swiveling spot with compact size and manual zoom adjustment with Fresnel lens, high-power 1 COB source. Complete with color gel frame. CUSTOM COLORS ON REQUEST.

Technical data:

Power supply	100-240 V AC 50/60Hz
Current	0.25 A @230V AC
Maximum power consumption	55W
Electrical insulation class	I
Connection	1 m OF NEOPRENE CABLE 3X1.5
Beam angle	17°/100°
Number of LEDs	1
LED colour	3000K
Colour Rendering	CRI>90
Total luminous flux	6900 lumens
Body	EXTRUDED ALUMINIUM + SHEET METAL
Finish colour	PAINTED BLACK
Weight	1.9 kg
IP protection rating	IP20
Working position	ANY
Cooling system	FORCED VENTILATION
Ambient temperature limits	-20°C/+40°C
Thermal protection	ACTIVE ELECTRONICS
Control signal	DALI

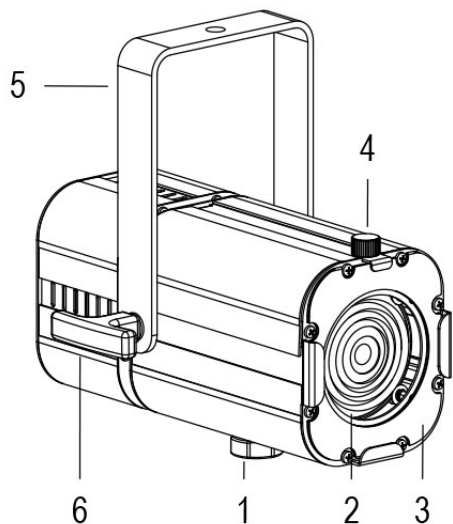


- 1 ADJUSTABLE ZOOM
- 2 FRESNEL LENS
- 3 GEL HOLDER FRAME
- 4 FRAME RETAINING FLYWHEEL
- 5 ORIENTABLE FORK
- 6 PIVOT HINGE

13/05/22 - The data in this document may be changed without notice in order to improve the product or to correct any errors.

MINI PONY F BLACK 3000K Cod. 9812035205

SPOTLIGHT WITH GEL HOLDER and 1m of CABLE

Handy and swiveling spot with compact size and manual zoom adjustment with Fresnel lens, high-power 1 COB source. Complete with color gel frame. CUSTOM COLORS ON REQUEST.

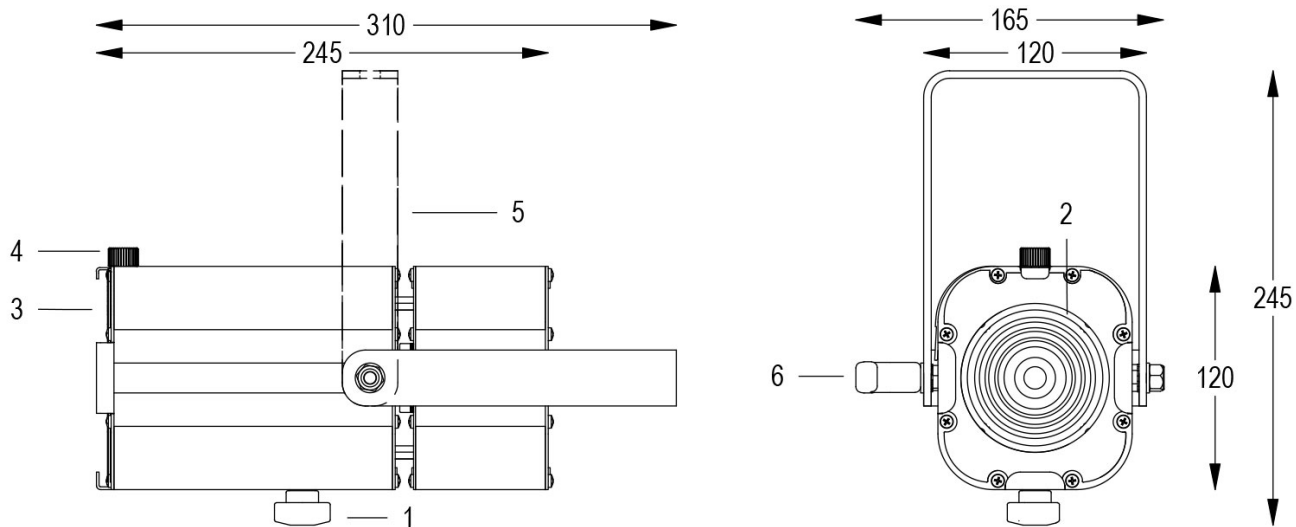

13/05/22 - The data in this document may be changed without notice in order to improve the product or to correct any errors.