

MINI PONY F DMX GREY 5600K


Cod. 9801034104

SPOTLIGHT WITH GEL HOLDER and 1m of CABLE

Handy orientable spotlight with a compact size and manual zoom adjustment with Fresnel lens, 1 COB high-power source, controlled with DMX 512 and DALI signals. Complete with gel holder frame. CUSTOM COLORS ON REQUEST.

Technical data:

Power supply	100-240 V AC 50/60Hz
Current	0.25 A @230V AC
Maximum power consumption	55W
Electrical insulation class	I
Connection	1 m OF NEOPRENE CABLE 3X1.5
Beam angle	17°/100°
Number of LEDs	1
LED colour	5600K
Colour Rendering	CRI>90
Total luminous flux	7300 lumens
Body	EXTRUDED ALUMINIUM + SHEET METAL
Finish colour	PAINTED GREY
Weight	1.8 kg
IP protection rating	IP20
Working position	ANY
Cooling system	FORCED VENTILATION
Ambient temperature limits	-20°C/+40°C
Thermal protection	ACTIVE ELECTRONICS
Control signal	DMX 512 - DALI
DMX channels	1 DIMMER (8bit) - 1 DIMMER msb, 2 DIMMER lsb (16bit)

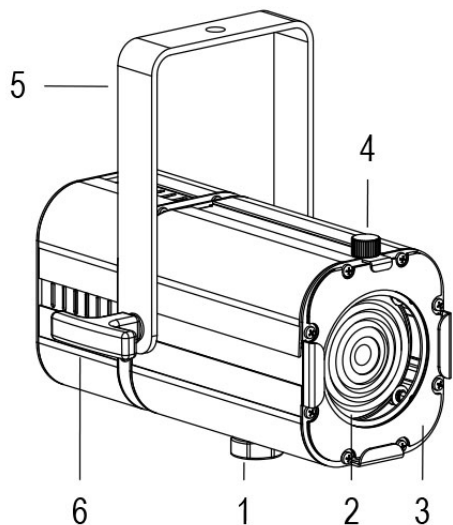

- 1 ADJUSTABLE ZOOM
- 2 FRESNEL LENS
- 3 GEL HOLDER FRAME
- 4 FRAME RETAINING FLYWHEEL
- 5 ORIENTABLE FORK
- 6 PIVOT HINGE


13/05/22 - The data in this document may be changed without notice in order to improve the product or to correct any errors.

MINI PONY F DMX GREY 5600K

Cod. 9801034104

SPOTLIGHT WITH GEL HOLDER and 1m of CABLE

Handy orientable spotlight with a compact size and manual zoom adjustment with Fresnel lens, 1 COB high-power source, controlled with DMX 512 and DALI signals. Complete with gel holder frame. CUSTOM COLORS ON REQUEST.

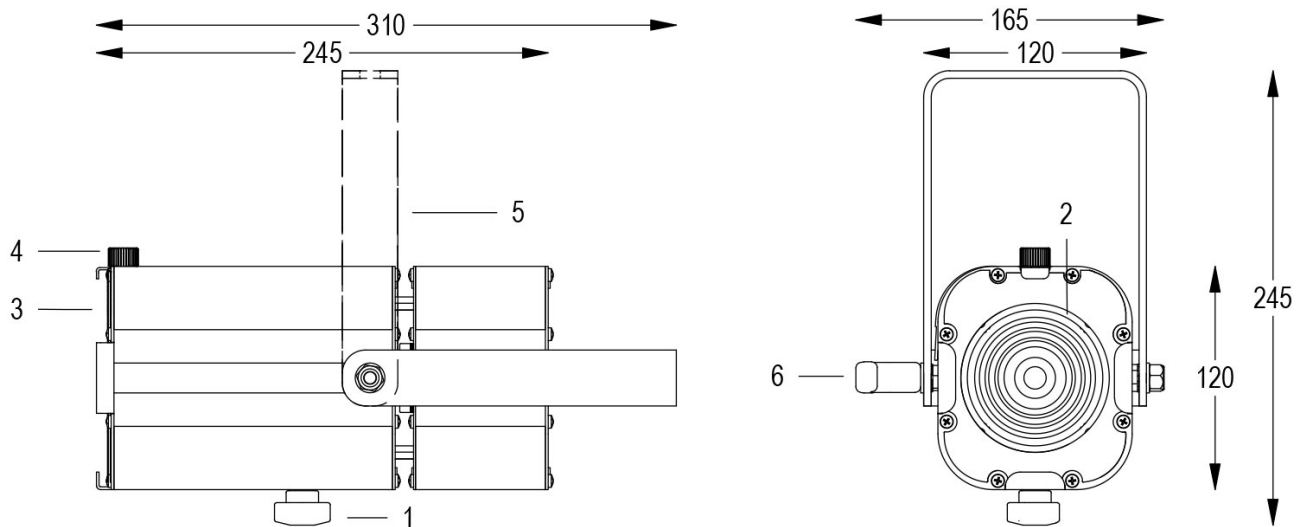

Allo zoom minimo

Dist. m	2	4	6	8	10	12
Lux	6019	1505	669	376	241	167
Diam. m	0,5	1,1	1,6	2,2	2,7	3,3

Allo zoom massimo

Dist. m	2	3	4	5	6	7
Lux	979	435	245	157	109	80
Diam. m	3,4	5,2	6,9	8,6	10,3	12,1

13/05/22 - The data in this document may be changed without notice in order to improve the product or to correct any errors.