

# MINI PONY PROFILE 20°/38° WHITE 5600K


**Cod. 9812004102**

SPOTLIGHT WITH GEL HOLDER and 1m of CABLE



Handy and adjustable spot with compact size with manual zoom and focus adjustment, high-power 1 COB source. Complete with color gel frame. CUSTOM COLORS ON REQUEST.

**Technical data:**

Power supply	100-240 V AC 50/60Hz
Current	0.25 A @230V AC
Maximum power consumption	55W
Electrical insulation class	I
Connection	1 m OF NEOPRENE CABLE 3X1.5
Beam angle	20°/38°
Number of LEDs	1
LED colour	5600K
Colour Rendering	CRI>90
Total luminous flux	7300 lumens
Body	EXTRUDED ALUMINIUM + SHEET METAL
Finish colour	PAINTED WHITE
Weight	2.8 kg
IP protection rating	IP20
Working position	ANY
Cooling system	FORCED VENTILATION
Ambient temperature limits	-20°C/+40°C
Thermal protection	ACTIVE ELECTRONICS
Control signal	DALI

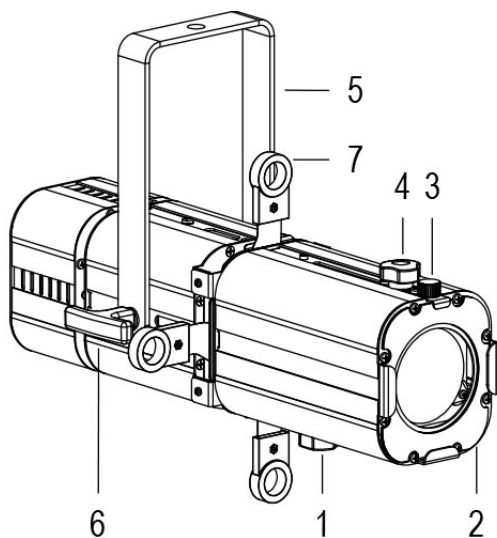

- 1 ADJUSTABLE ZOOM
- 2 GEL HOLDER FRAME
- 3 FRAME RETAINING FLYWHEEL
- 4 ADJUSTABLE FOCUS
- 5 ORIENTABLE FORK
- 6 PIVOT HINGE
- 7 SHAPING SHUTTERS

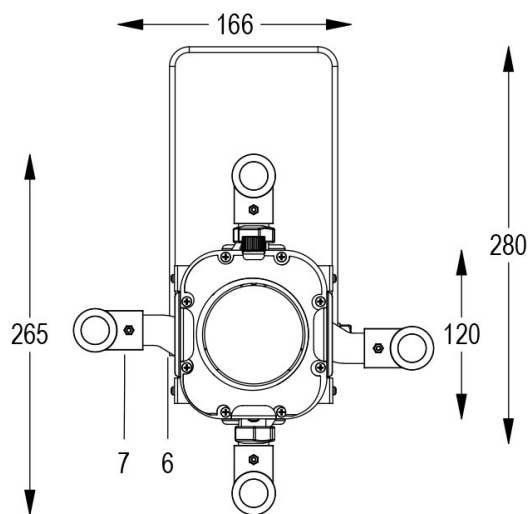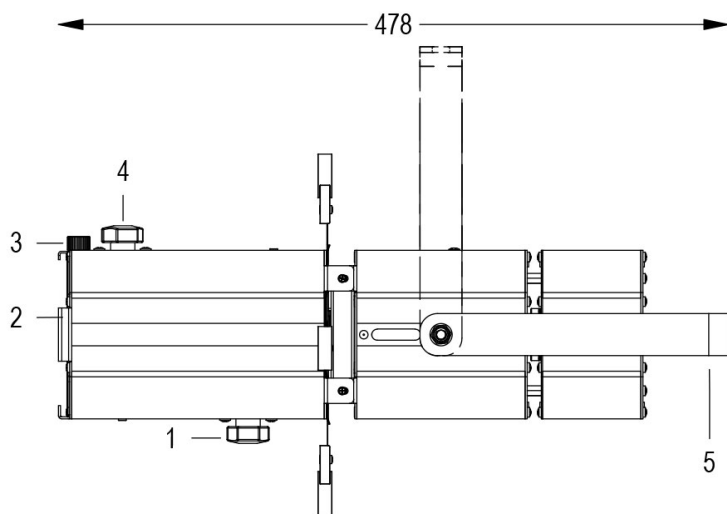

13/05/22 - The data in this document may be changed without notice in order to improve the product or to correct any errors.

# MINI PONY PROFILE 20°/38° WHITE 5600K

**Cod. 9812004102**

SPOTLIGHT WITH GEL HOLDER and 1m of CABLE

Handy and adjustable spot with compact size with manual zoom and focus adjustment, high-power 1 COB source. Complete with color gel frame. CUSTOM COLORS ON REQUEST.

Allo zoom minimo

<b>Dist. m</b>	2	4	6	8	10	12
<b>Lux</b>	6500	1625	722	406	260	181
<b>Diam. m</b>	0,8	1,5	2,3	3,0	3,8	4,6

Allo zoom massimo

<b>Dist. m</b>	2	4	6	8	10	12
<b>Lux</b>	3975	994	442	248	159	110
<b>Diam. m</b>	1,4	2,9	4,3	5,8	7,2	8,6

13/05/22 - The data in this document may be changed without notice in order to improve the product or to correct any errors.