

MINI PONY PROFILE 20°/38° GREY 5600K


Cod. 9812004104

SPOTLIGHT WITH GEL HOLDER and 1m of CABLE



Handy and adjustable spot with compact size with manual zoom and focus adjustment, high-power 1 COB source. Complete with color gel frame. CUSTOM COLORS ON REQUEST.

Technical data:

| | |
|-----------------------------|----------------------------------|
| Power supply | 100-240 V AC 50/60Hz |
| Current | 0.25 A @230V AC |
| Maximum power consumption | 55W |
| Electrical insulation class | I |
| Connection | 1 m OF NEOPRENE CABLE 3X1.5 |
| Beam angle | 20°/38° |
| Number of LEDs | 1 |
| LED colour | 5600K |
| Colour Rendering | CRI>90 |
| Total luminous flux | 7300 lumens |
| Body | EXTRUDED ALUMINIUM + SHEET METAL |
| Finish colour | PAINTED GREY |
| Weight | 2.8 kg |
| IP protection rating | IP20 |
| Working position | ANY |
| Cooling system | FORCED VENTILATION |
| Ambient temperature limits | -20°C/+40°C |
| Thermal protection | ACTIVE ELECTRONICS |
| Control signal | DALI |

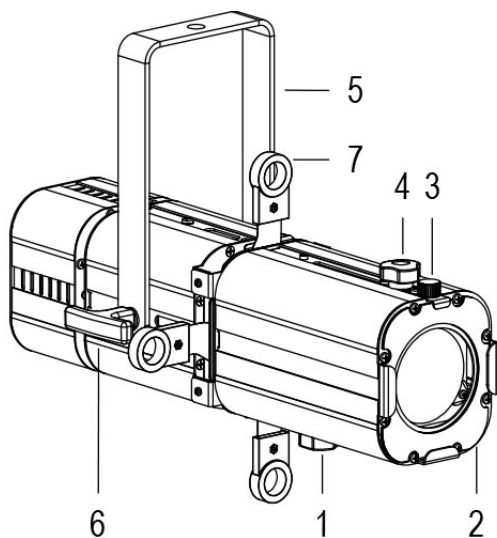

- 1 ADJUSTABLE ZOOM
- 2 GEL HOLDER FRAME
- 3 FRAME RETAINING FLYWHEEL
- 4 ADJUSTABLE FOCUS
- 5 ORIENTABLE FORK
- 6 PIVOT HINGE
- 7 SHAPING SHUTTERS

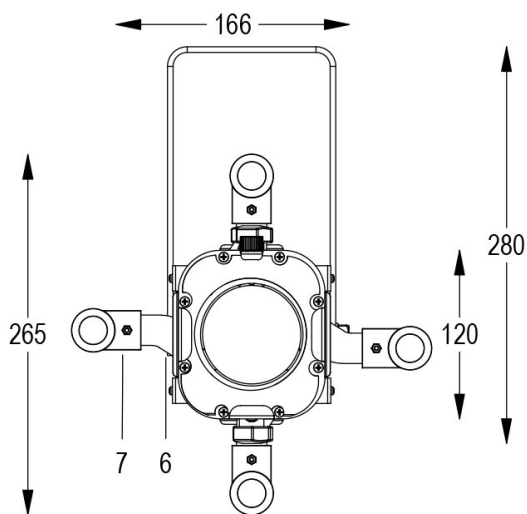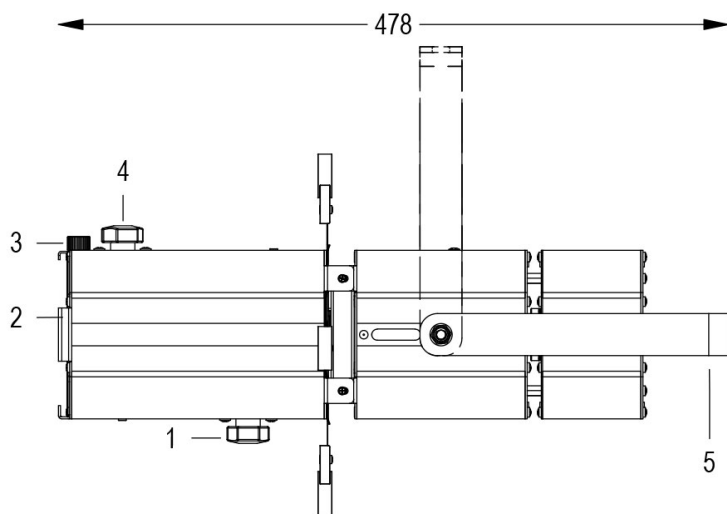

13/05/22 - The data in this document may be changed without notice in order to improve the product or to correct any errors.

MINI PONY PROFILE 20°/38° GREY 5600K

Cod. 9812004104

SPOTLIGHT WITH GEL HOLDER and 1m of CABLE

Handy and adjustable spot with compact size with manual zoom and focus adjustment, high-power 1 COB source. Complete with color gel frame. CUSTOM COLORS ON REQUEST.

Allo zoom minimo

| | | | | | | |
|----------------|------|------|-----|-----|-----|-----|
| Dist. m | 2 | 4 | 6 | 8 | 10 | 12 |
| Lux | 6500 | 1625 | 722 | 406 | 260 | 181 |
| Diam. m | 0,8 | 1,5 | 2,3 | 3,0 | 3,8 | 4,6 |

Allo zoom massimo

| | | | | | | |
|----------------|------|-----|-----|-----|-----|-----|
| Dist. m | 2 | 4 | 6 | 8 | 10 | 12 |
| Lux | 3975 | 994 | 442 | 248 | 159 | 110 |
| Diam. m | 1,4 | 2,9 | 4,3 | 5,8 | 7,2 | 8,6 |

13/05/22 - The data in this document may be changed without notice in order to improve the product or to correct any errors.