

# FORTE PROFILE 150 HD WL Cod. 0913067005


## 16°/30° 5600K BLACK

FIXTURE WITH 1m of CABLE


Handy orientable profiler with a compact size and manual adjustment of zoom and focus, with high-definition optics, 1 COB source with ultra-high light output, controlled with DMX 512 wireless signal. Salt mist resistant paint. Anti-condensation valve. Complete with gobo holder.

### Technical data:

Power supply	100-240 V AC 50/60Hz
Current	0.25 A @230V AC
Maximum power consumption	58W
Electrical insulation class	I
Connection	1 m OF NEOPRENE CABLE 3X1.5
Beam angle	16°/30°
Number of LEDs	1
LED colour	5600K
Colour Rendering	CRI>80
Total luminous flux	5952 lumens
Body	ANODIZED ALUMINIUM
Finish colour	PAINTED BLACK
Weight	5.6 kg
IP protection rating	IP65
Working position	ANY
Cooling system	NATURAL CONVECTION
Ambient temperature limits	-20°C/+40°C
Thermal protection	ACTIVE ELECTRONICS
Control signal	WIRELESS DMX

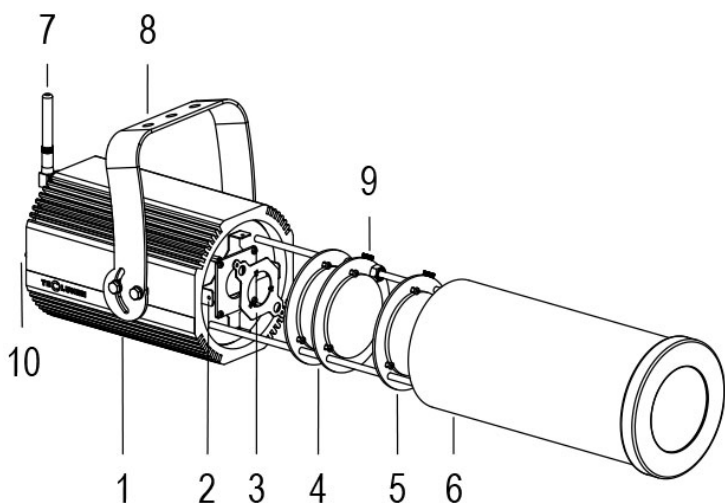

- 1 ALUMINIUM DIE CASTING
- 2 SHUTTERS
- 3 GOBO HOLDER
- 4 ZOOM LENSES
- 5 FOCUS LENS
- 6 IP65 COVERAGE
- 7 WIRELESS ANTENNA
- 8 ORIENTABLE BRACKET
- 9 ZOOM AND FOCUS TIGHTENING
- 10 ANTI-CONDENSATION VALVE

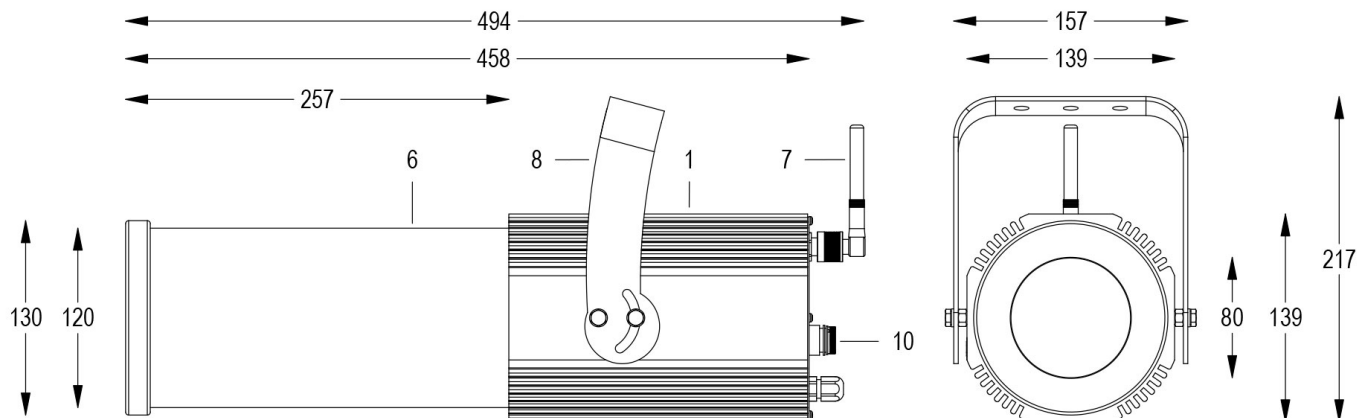

16/05/22 - The data in this document may be changed without notice in order to improve the product or to correct any errors.

# FORTE PROFILE 150 HD WL Cod. 0913067005

## 16°/30° 5600K BLACK

FIXTURE WITH 1m of CABLE

Handy orientable profiler with a compact size and manual adjustment of zoom and focus, with high-definition optics, 1 COB source with ultra-high light output, controlled with DMX 512 wireless signal. Salt mist resistant paint. Anti-condensation valve. Complete with gobo holder.

### Allo zoom minimo

Dist. m	5	10	15	20	25	30
Lux	4360	1090	484	273	174	121
Diam. m	1,4	2,8	4,2	5,6	7,1	8,5

### Allo zoom massimo

Dist. m	5	10	15	20	25	30
Lux	2747	687	305	172	110	76
Diam. m	2,7	5,4	8,0	10,7	13,4	16,1

16/05/22 - The data in this document may be changed without notice in order to improve the product or to correct any errors.