

FORTE PROFILE 150 HD 20°/40° 5600K BLACK


Cod. 0913063405

FIXTURE WITH 1m of CABLE

Handy orientable profiler with a compact size and manual adjustment of zoom and focus, with high-definition optics, 1 COB source with ultra-high light output. Salt mist resistant paint. Anti-condensation valve. Complete with gobo holder.

Technical data:

Power supply	100-240 V AC 50/60Hz
Current	0.25 A @230V AC
Maximum power consumption	58W
Electrical insulation class	NATURAL CONVECTION
Connection	1 m OF NEOPRENE CABLE 3X1.5
Beam angle	20°/40°
Number of LEDs	1
LED colour	5600K
Colour Rendering	CRI>80
Total luminous flux	5952 lumens
Body	ANODIZED ALUMINIUM
Finish colour	PAINTED BLACK
Weight	5.6 kg
IP protection rating	IP65
Working position	ANY
Cooling system	NATURAL CONVECTION
Ambient temperature limits	-20°C/+40°C
Thermal protection	ACTIVE ELECTRONICS
Control signal	ON/OFF

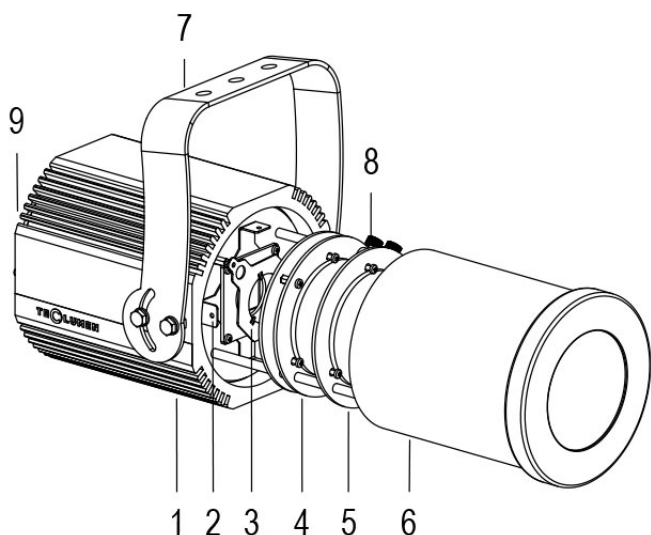

- 1 ALUMINIUM DIE CASTING
- 2 SHUTTERS
- 3 GOBO HOLDER
- 4 ZOOM LENSES
- 5 FOCUS LENS
- 6 IP65 COVERAGE
- 7 ORIENTABLE BRACKET
- 8 ZOOM AND FOCUS TIGHTENING
- 9 ANTI-CONDENSATION VALVE


16/05/22 - The data in this document may be changed without notice in order to improve the product or to correct any errors.

FORTE PROFILE 150 HD 20°/40° 5600K BLACK

Cod. 0913063405

FIXTURE WITH 1m of CABLE

Handy orientable profiler with a compact size and manual adjustment of zoom and focus, with high-definition optics, 1 COB source with ultra-high light output. Salt mist resistant paint. Anti-condensation valve. Complete with gobo holder.

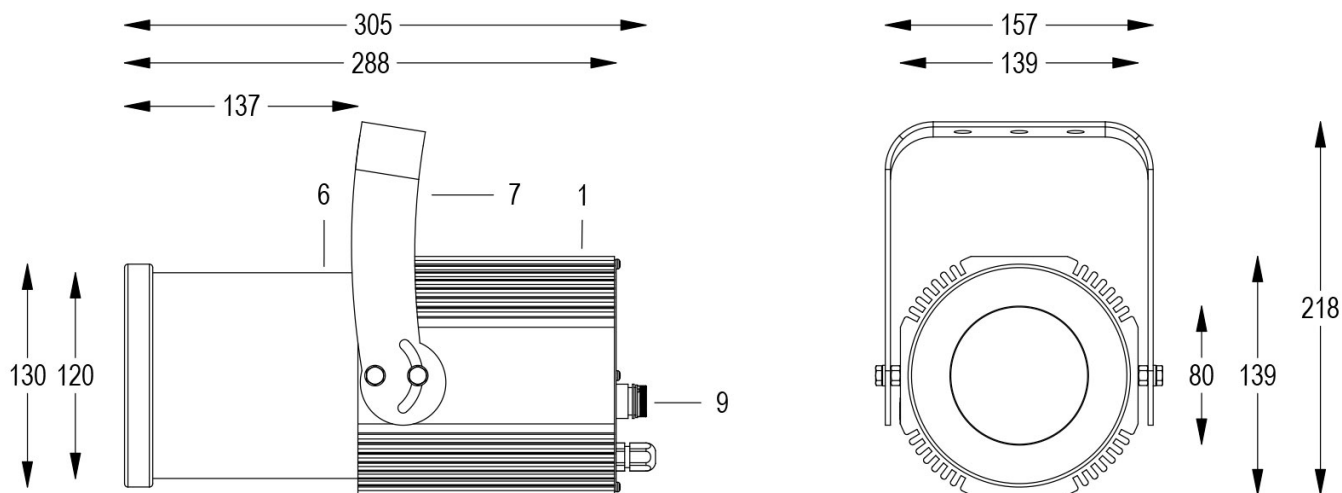

Allo zoom minimo

Dist. m	5	10	15	20	25	30
Lux	2440	610	271	153	98	68
Diam. m	1,8	3,5	5,3	7,0	8,8	10,6

Allo zoom massimo

Dist. m	6	8	10	12	14	16
Lux	648	364	233	162	119	91
Diam. m	4,4	5,8	7,3	8,7	10,2	11,6

16/05/22 - The data in this document may be changed without notice in order to improve the product or to correct any errors.