

FORTE PROFILE 150 COLOR Cod. 0912056694


RGBW DMX 12°/16° GREY

FIXTURE WITH 1m of CABLE


Handy orientable profiler with a compact size and manual adjustment of zoom and focus, with high-definition optics, 1 RGBW COB source, controlled with DMX 512 cables. Complete with gobo holder.

Technical data:

Power supply	100-240 V AC 50/60Hz
Current	0.25 A @230V AC
Maximum power consumption	58W
Electrical insulation class	I
Connection	1 m OF NEOPRENE CABLE 5X1
Beam angle	12°/16°
Number of LEDs	1
LED colour	RGBW
Total luminous flux	2600 lumens
Body	ANODIZED ALUMINIUM
Finish colour	PAINTED GREY RESISTANT TO SALT MIST
Weight	5.6 kg
IP protection rating	IP65
Working position	ANY
Cooling system	NATURAL CONVECTION
Ambient temperature limits	-20°C/+40°C
Thermal protection	ACTIVE ELECTRONICS
Control signal	DMX 512

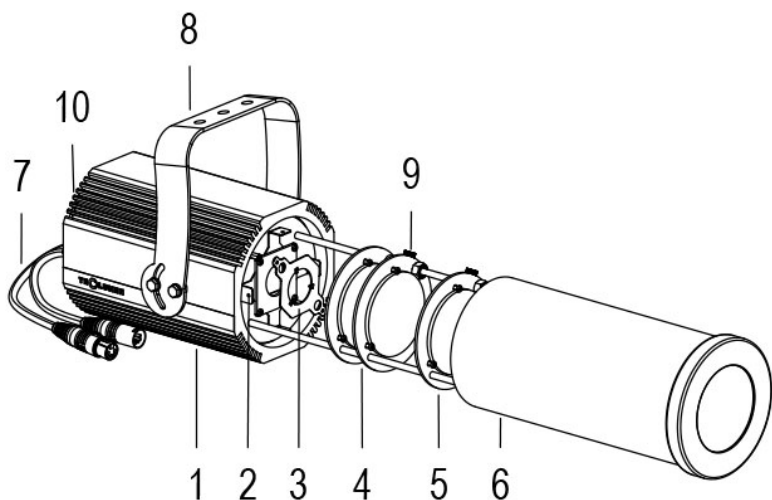

- 1 ALUMINIUM DIE CASTING
- 2 SHUTTERS
- 3 GOBO HOLDER
- 4 ZOOM LENSES
- 5 FOCUS LENS
- 6 IP65 COVERAGE
- 7 DMX CABLES + CONNECTORS
- 8 ORIENTABLE BRACKET
- 9 ZOOM AND FOCUS TIGHTENING
- 10 ANTI-CONDENSATION VALVE

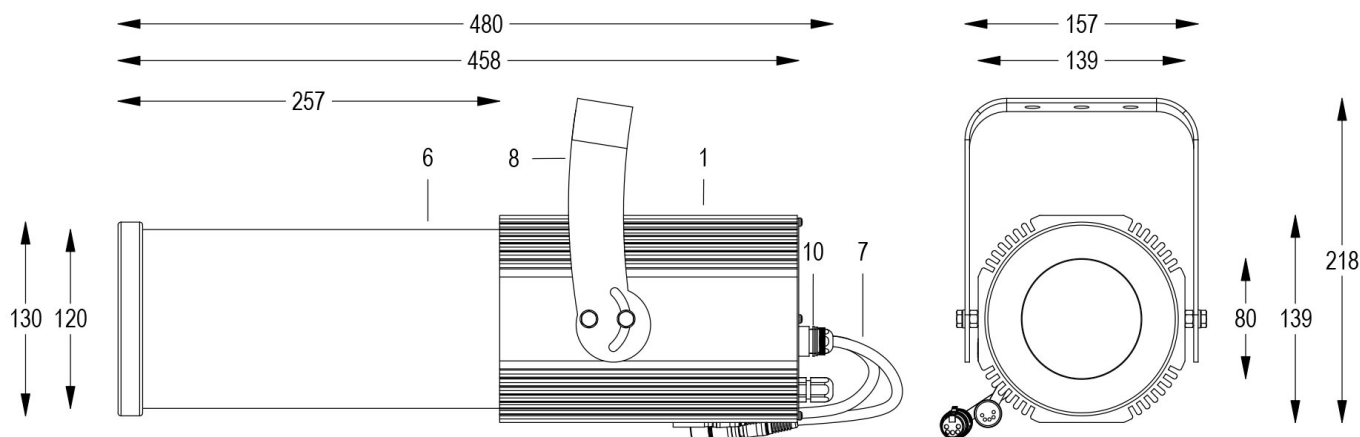

16/05/22 - The data in this document may be changed without notice in order to improve the product or to correct any errors.

FORTE PROFILE 150 COLOR Cod. 0912056694

RGBW DMX 12°/16° GREY

FIXTURE WITH 1m of CABLE

Handy orientable profiler with a compact size and manual adjustment of zoom and focus, with high-definition optics, 1 RGBW COB source, controlled with DMX 512 cables. Complete with gobo holder.

Allo zoom minimo

Dist. m	5	10	15	20	25	30
Lux	2090	523	232	131	84	58
Diam. m	1,0	2,0	3,0	4,0	5,0	6,0

Allo zoom massimo

Dist. m	5	10	15	20	25	30
Lux	1260	315	140	79	50	35
Diam. m	1,5	2,9	4,4	5,8	7,3	8,7

16/05/22 - The data in this document may be changed without notice in order to improve the product or to correct any errors.