

MINI PONY F GREY 5600K


Cod. 9812034104

SPOTLIGHT WITH GEL HOLDER and 1m of CABLE

Handy and swiveling spot with compact size and manual zoom adjustment with Fresnel lens, high-power 1 COB source. Complete with color gel frame. CUSTOM COLORS ON REQUEST.

Technical data:

| | |
|-----------------------------|----------------------------------|
| Power supply | 100-240 V AC 50/60Hz |
| Current | 0.25 A @230V AC |
| Maximum power consumption | 55W |
| Electrical insulation class | I |
| Connection | 1 m OF NEOPRENE CABLE 3X1.5 |
| Beam angle | 17°/100° |
| Number of LEDs | 1 |
| LED colour | 5600K |
| Colour Rendering | CRI>90 |
| Total luminous flux | 7300 lumens |
| Body | EXTRUDED ALUMINIUM + SHEET METAL |
| Finish colour | PAINTED GREY |
| Weight | 1.9 kg |
| IP protection rating | IP20 |
| Working position | ANY |
| Cooling system | FORCED VENTILATION |
| Ambient temperature limits | -20°C/+40°C |
| Thermal protection | ACTIVE ELECTRONICS |
| Control signal | DALI |

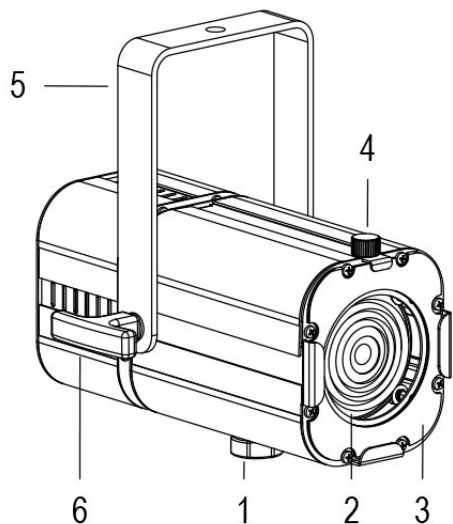

- 1 ADJUSTABLE ZOOM
- 2 FRESNEL LENS
- 3 GEL HOLDER FRAME
- 4 FRAME RETAINING FLYWHEEL
- 5 ORIENTABLE FORK
- 6 PIVOT HINGE


13/05/22 - The data in this document may be changed without notice in order to improve the product or to correct any errors.

MINI PONY F GREY 5600K

Cod. 9812034104

SPOTLIGHT WITH GEL HOLDER and 1m of CABLE

Handy and swiveling spot with compact size and manual zoom adjustment with Fresnel lens, high-power 1 COB source. Complete with color gel frame. CUSTOM COLORS ON REQUEST.

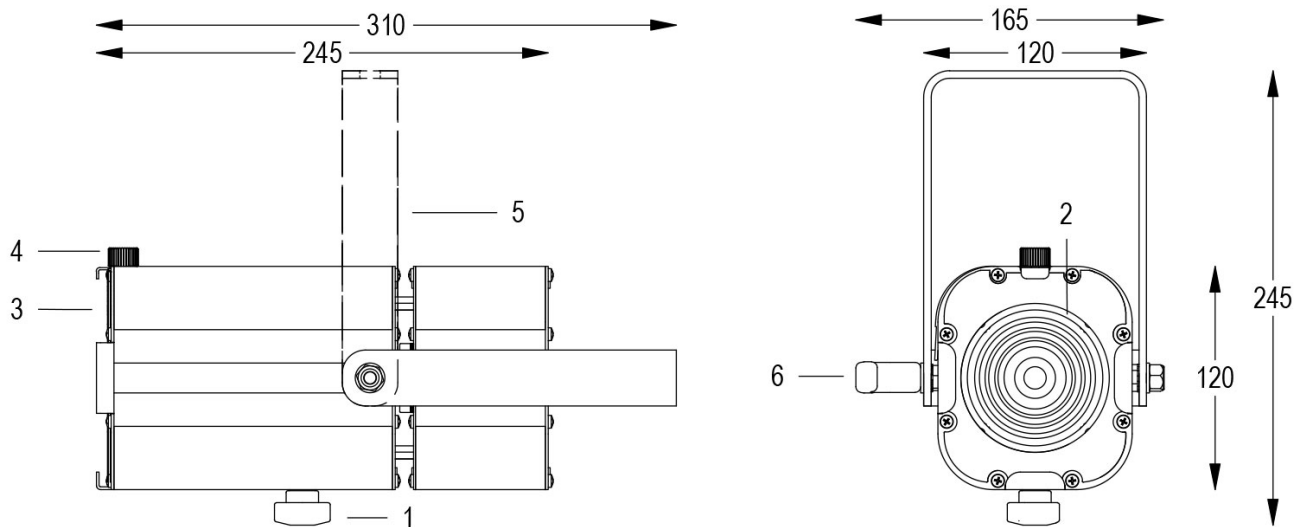

Allo zoom minimo

| | | | | | | |
|----------------|------|------|-----|-----|-----|-----|
| Dist. m | 2 | 4 | 6 | 8 | 10 | 12 |
| Lux | 6019 | 1505 | 669 | 376 | 241 | 167 |
| Diam. m | 0,5 | 1,1 | 1,6 | 2,2 | 2,7 | 3,3 |

Allo zoom massimo

| | | | | | | |
|----------------|-----|-----|-----|-----|------|------|
| Dist. m | 2 | 3 | 4 | 5 | 6 | 7 |
| Lux | 979 | 435 | 245 | 157 | 109 | 80 |
| Diam. m | 3,4 | 5,2 | 6,9 | 8,6 | 10,3 | 12,1 |

13/05/22 - The data in this document may be changed without notice in order to improve the product or to correct any errors.